


产品型号IPC-2600



产品特性

- ▶ Intel® Kaby Lake-S/Skylake-S Series CPU to maximize performance
- ▶ 2 DDR4 2133/2400MHz UDIMMs slots up to 32 GB memory
- ▶ Supports VGA, HDMI and dual Intel® GbE LAN
- ▶ Supports 4 SATA-3.0, 4 USB 3.0, 5 USB 2.0
- ▶ 6 COM ports for flexible applications
- ▶ Supports 1 PCIe x 16, 1 PCIe x4 and 5 PCI Slots
- ▶ ATX Power

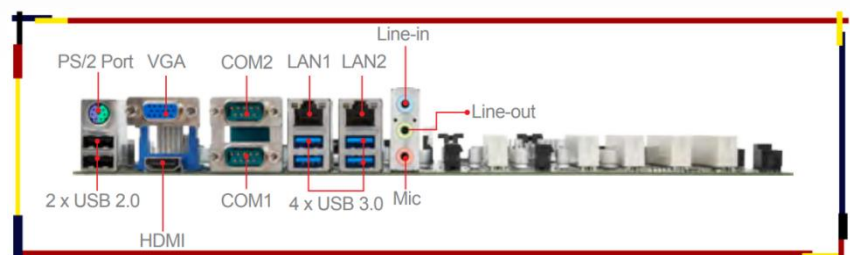

 **技术参数**


| ■ 产品型号 | | IPC-2600 |
|--------|-------------------------------|---|
| 系统 | CPU | 7th/6th Gen Intel® Desktop Kaby Lake/Skylake i7/i5/i3/ Pentium® /Celeron® Series Processor, Max 65W |
| | 芯片组 | Intel® H110 Express Chipset |
| | 系统内存 | 2 * DDR4 UDIMM slots / Dual-Channel DDR4 memory up to 2133/2400MHz /Max 32GB |
| | 扩展 | 1 * PCIe x16 slot (PCIe1) 1 * PCIe x4 signal (PCIe2) 5 * PCI slots (PCI1, PCI2, PCI3, PCI4, PCI5) |
| | GPU&显卡 | 1*VGA up to 1920 x 1200 @60Hz 1*HDMI up to 4096 x 2160 @24Hz |
| | 音频 | Realtek® ALC887 High Definition Audio codec (Co-lay ALC888S) 1 * Line-In jack 1 * Line-Out jack 1 * Mic-In jack |
| | 以太网 | 1 x Intel® I219-LM GbE LAN PHY 1 x Intel® I211-AT GbE LAN |
| | 存储 | 4 x SATA 3.0 |
| | PS/2 | 1 x PS/2 port by Y-cable for keyboard and mouse |
| | USB接口 | 4 x USB 3.0 (4 x rear) 5 x USB 2.0 (2 x rear) 3 x internal with one Vertical Type-A) |
| | 串口接口 | 6 x COM ports (2 x rear, 4 x Internal) COM1: RS-232/422/485, 0V/5V/12V, Auto-flow Control COM2~6: RS-232, COM2: 0V/5V/12V |
| | 控制开关 | 1 * Power switch |
| | 电源要求 | ATX-Power 24P, 12V-8P |
| GPIO | 8-bits (4 x GPI; 4 x GPO), 5V | |

| | | |
|----|--------|---|
| | 操作系统 | Windows 10 (64-bit) Windows 7 (32/64-bit) (Intel® Skylake-S Series CPU Only) Windows 8.1 (64-bit) (Intel® Skylake-S Series CPU Only) Linux Fedora 23 (by request) Linux Ubuntu 16.04 (by request) |
| 结构 | 构造 | SGCC箱体 |
| | 颜色 | 银色 |
| | 安装方式 | 上架式安装 |
| | 包装尺寸 | 400x428x88.5mm |
| | 净重 | 9.5KG |
| 环境 | 工作温度 | -10 ~ 60°C |
| | 存储温度 | -20 ~ 80°C |
| | 存储湿度 | 10 ~ 90%, non-condensing |
| | 振动 | 5grms/5~500Hz/随机/工作状态(SSD); 1grms/5~500Hz/随机/工作状态(HDD) |
| | 冲击 | 50g峰值加速度(持续11ms)(SSD); 20g峰值加速度(持续11ms)(HDD) |
| | EMC/认证 | 质量管理体系符合GB/T19001-2016/ISO9001:2015/CE/CCC/FCC |

■ 订购信息

| | | |
|----------|---------------|---|
| IPC-2600 | IPC-2600/S001 | Intel® Core i3-6100/i3-6100TE /2*DDR4/1*PCIe x16/1*PCIe x4/5*PCI/ 1*HDMI/1*VGA/2*LAN/4*USB3.0/5*USB2.0/ATX 24pin POWER |
| | IPC-2600/S002 | Intel® Core i3-6100/i3-6100TE/2*DDR4/1*PCIe x16/1*PCIe x4/5*PCI/ 1*HDMI/1*VGA/2*LAN/4*USB3.0/5*USB2.0/ATX 24pin POWER |
| | IPC-2600/S003 | Intel® Core i7-6700/i7-6700TE/2*DDR4/1*PCIe x16/1*PCIe x4/5*PCI/1*HDMI/1*VGA/2*LAN/4*USB3.0/5*USB2.0/ATX 24pin POWER |
| 供电 | PA-300ATX | ADC110/220V宽范围，并且在DC90V~DC264V范围内正常工作 |
| | PA-450ATX | ADC110/220V宽范围，并且在DC90V~DC264V范围内正常工作 |
| | PA-550W冗余 | AC INPUT/输入/输入：100-240V~7-3.5A 60/50Hz DC INPUT/输入/输入：240V=3.5A(仅限中国地区使用/Only in China) |

外形尺寸

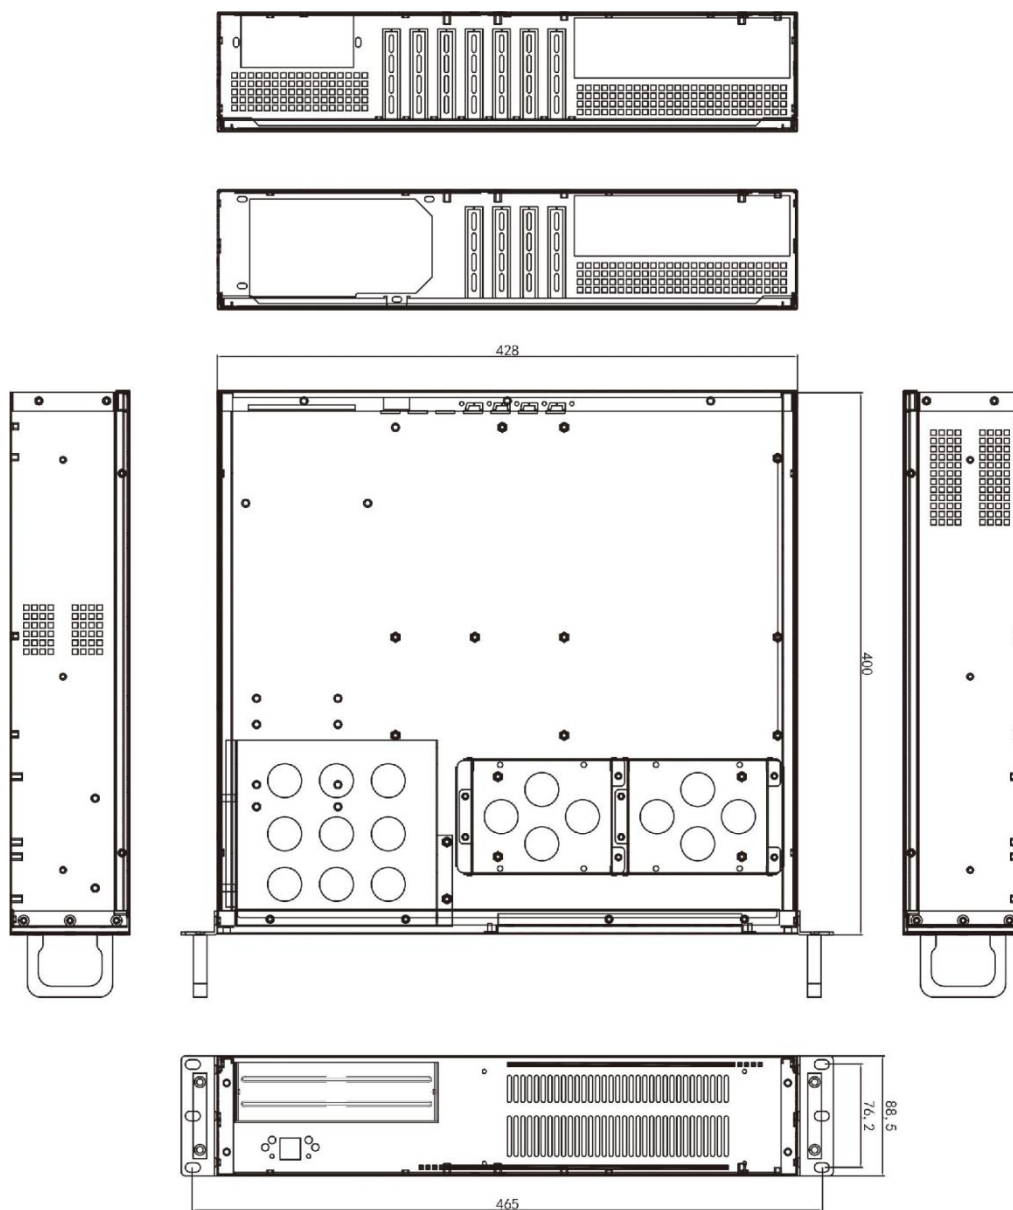

北京总部

公司电话: +86(0)10 -82331878/82331875

服务热线: 400-800-1871

办公地址: 北京市海淀区双清路3号鸿运大厦1层31078室

工厂地址: 河北省廊坊市三河市燕郊开发区留山大街

创智谷产业园-1#地块-一期-4#-2-101

了解更多信息: www.ipccore.com ,或发送邮件到: ipc@ipccore.com规格细节如有变更, 恕不另行通知
东方松柏科技(北京) 有限公司, 版权所有©2018